



## “Malia” Sporting Pacific Pump & Power Custom Made T-Shirt



Photo courtesy of Creighton S. Q. Chang of Hawaiian Dredging

### Mahalo for your Business!




## Cherne Pipe Plug Safety



### GENERAL SAFETY AND USAGE INSTRUCTIONS:

- Death, bodily injury and/or property damage may result if the plug fails for any reason.
- Read and understand the Safety Instruction Sheet before using the plug.
- All personnel must wear safety glasses and a hard hat.
- Do not enter the Danger Zone when a plug is in use. The Danger Zone exists in front of the plugged pipe opening in an area which expands outwardly in a cone shape (see below).
- Measure the pipe diameter before selecting the plug.
- Inspect plug for damage before and after use.
- Never use a plug in a pipe size different from recommended usage range.
- Always attach an inflation extension hose so plug can be inflated and deflated from outside the danger zone.
- Never remove the inflation hose until all backpressure is released and the plug is deflated.
- Must inflate plug to the pressure shown on plug.
- Always use properly calibrated pressure gauges.
- Do not exceed recommended maximum allowable backpressure.
- Always release backpressure from the pipe first, before deflating plug.

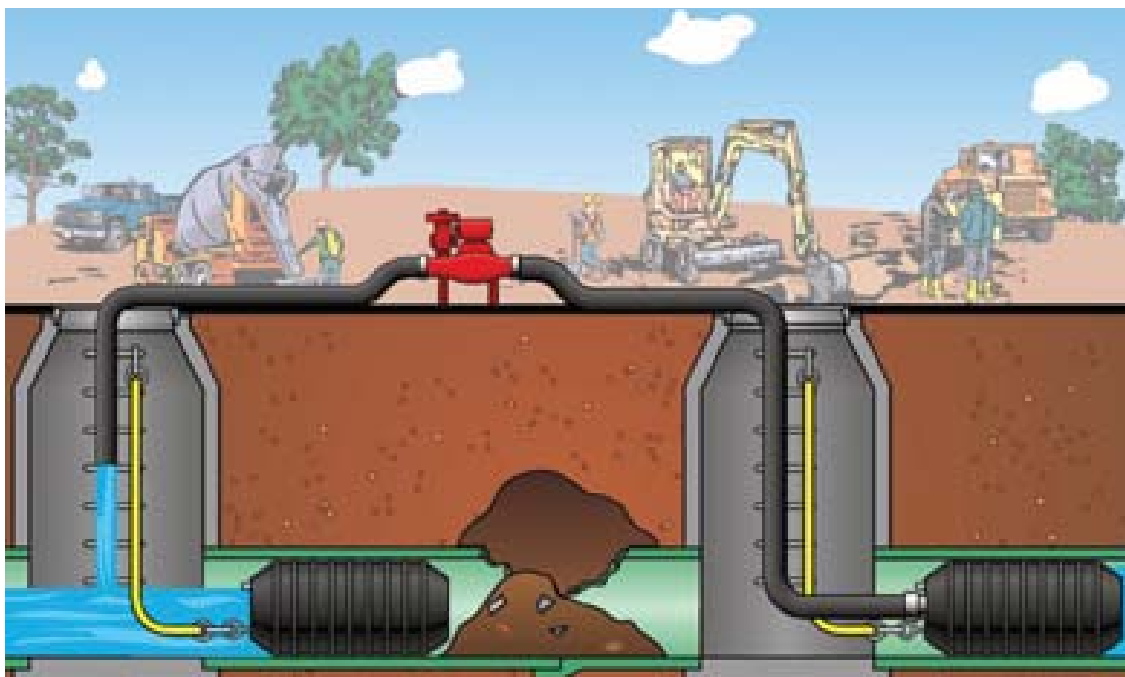



# The Pacific Pipeline

godwin pumps®

The Monthly Newsletter of Pacific Pump and Power, Distributor of Godwin Pumps®

Rental • Sales • Service

September 2008



60 Pumps, Generators and Light Plants Available for Rent or Purchase in Hawaii

Pump Type	Quantity Available	Pump Model and Description
Godwin Dri-Prime CD Series Pumps, High Volume, Medium Head, Large Solids-Handling Capabilities	32 AVAILABLE	<ul style="list-style-type: none"> <li>•DPC300 12" Diesel, up to 5000 gpm or up to 115' of head</li> <li>•DPC300 12" Electric, up to 4000 gpm or up to 115' of head</li> <li>•CD225M 8" Diesel, up to 3100 gpm or up to 183' of head</li> <li>•CD225M 8" Electric, up to 3100 gpm or up to 175' of head</li> <li>•CD150M 6" Diesel, up to 1700 gpm or up to 160' of head</li> <li>•CD103M 4" Diesel, up to 1000 gpm or up to 170' of head</li> <li>•CD100M 4" Diesel, up to 750 gpm or up to 115' of head</li> <li>•CD80M 3" Diesel, up to 450 gpm or up to 93' of head</li> </ul>
Godwin HL Series, High Head Pumps with Solids-Handling Capabilities	7 AVAILABLE	<ul style="list-style-type: none"> <li>•HL5M 6" Diesel, up to 1450 gpm or up to 500' of head</li> <li>•HL80M, 3" Diesel, up to 450 gpm or up to 325' of head</li> </ul>
Godwin Heidra Hydraulic Submersibles	2 AVAILABLE	<ul style="list-style-type: none"> <li>•HS150VSG 6", Diesel, up to 1600 gpm or up to 160' of head</li> <li>•HS100TD 4", Diesel, up to 800 gpm or up to 130' of head</li> </ul>
Godwin Sub-Prime Electric Submersibles	7 AVAILABLE	<ul style="list-style-type: none"> <li>•GSP600SV, 8", up to 3650 gpm or up to 82' of head</li> <li>•GSP160HV, 6", up to 1200 gpm or up to 115' of head</li> <li>•GSP55, 4", up to 550 gpm or up to 75' of head</li> <li>•GSP10-115, 2", up to 90 gpm or up to 60' of head</li> </ul>
Godwin Wet-Prime Gas Trash Pumps	2 AVAILABLE	<ul style="list-style-type: none"> <li>•GTP80HX, 3"</li> </ul>
Godwin Versamatic Diaphragm Pumps	7 AVAILABLE	<ul style="list-style-type: none"> <li>•Versamatic Air Operated E3, 3", up to 260gpm</li> <li>•Versamatic Air Operated E2, 2", up to 155gpm</li> <li>•Versamatic Air Operated E4, 1 1/2" x 1 1/4", up to 70gpm</li> </ul>
Godwin Power Diesel Generator Sets	1 AVAILABLE	<ul style="list-style-type: none"> <li>•26kW-R Series, Critically Silenced</li> </ul>
Gasoline Generator Sets	1 AVAILABLE	<ul style="list-style-type: none"> <li>•3000 Watt, Portable Honda Model</li> </ul>
Godwin Portable Light Towers	3 AVAILABLE	<ul style="list-style-type: none"> <li>•GLT 416, 4000 Watts, Coverage of 5-7 acres</li> </ul>
Road Ramp Crossings	10 AVAILABLE	<ul style="list-style-type: none"> <li>•4", 6", 8" and 12" Road Ramps Crossings</li> </ul>
Hydraulic Hoses	800 FEET	<ul style="list-style-type: none"> <li>•1/4", 1/2", 3/4" and 1" Hydraulic Hose with Couplers</li> </ul>
Heavy Duty Hoses	5920 FEET	<ul style="list-style-type: none"> <li>•2", 3", 4", 6", 8", and 12" Heavy Duty Suction and Discharge Hose Available with Quick Disconnect Fittings</li> </ul>
Bauer Light Weight, Quick Disconnect Pipe	5780 FEET	<ul style="list-style-type: none"> <li>•4", 6", 8", and 12" Bauer Light Weight Quick Disconnect Pipe in 10' and 20' Lengths</li> </ul>
Pump Accessories	3700 IN STOCK	<ul style="list-style-type: none"> <li>•Bauer and Camlock Fittings from 2-12" Available</li> </ul>
Pump Parts	950 IN STOCK	<ul style="list-style-type: none"> <li>•Common Wear Parts for all Pumps Already in Stock</li> </ul>
Cherne Pipe Plugs	5 AVAILABLE	<ul style="list-style-type: none"> <li>•8-12", 12-24", 15-30" and 24-42" with Sleeves and Inflators</li> </ul>
Toyo Dredge Pumps	3 AVAILABLE	<ul style="list-style-type: none"> <li>•DL-4 3" Submersible, Electric, 30gpm or up to 27' of head</li> <li>•DL-1 2" Submersible Electric, 130gpm or up to 30' of head</li> </ul>



Dredge Pumps

For immediate assistance please contact:

Patrick Baker, 721-0264, pbaker@pacificpumpandpower.com or  
Jeremy Leonard, 721-0127, jleonard@pacificpumpandpower.com

Call today at 672-8198 or visit us at Campbell Industrial: 91-503 Nukuawa Street, Kapolei